

HAHN DOUBLE-STROKE GAS SPRINGS



© HAHN Gasfedern GmbH

The catalogue is subject to technical alterations and printing mistakes / DHG.EN 10/2016

HAHN Gasfedern GmbH

Waldstrasse 39–43, 73773 Aichwald, Germany

Fon +49 (0) 711 936 705-0 | Fax -40


info@hahn-gasfedern.com | www.hahn-gasfedern.com



Made in Germany

www.hahn-gasfedern.com


HAHN DOUBLE-STROKE GAS SPRINGS

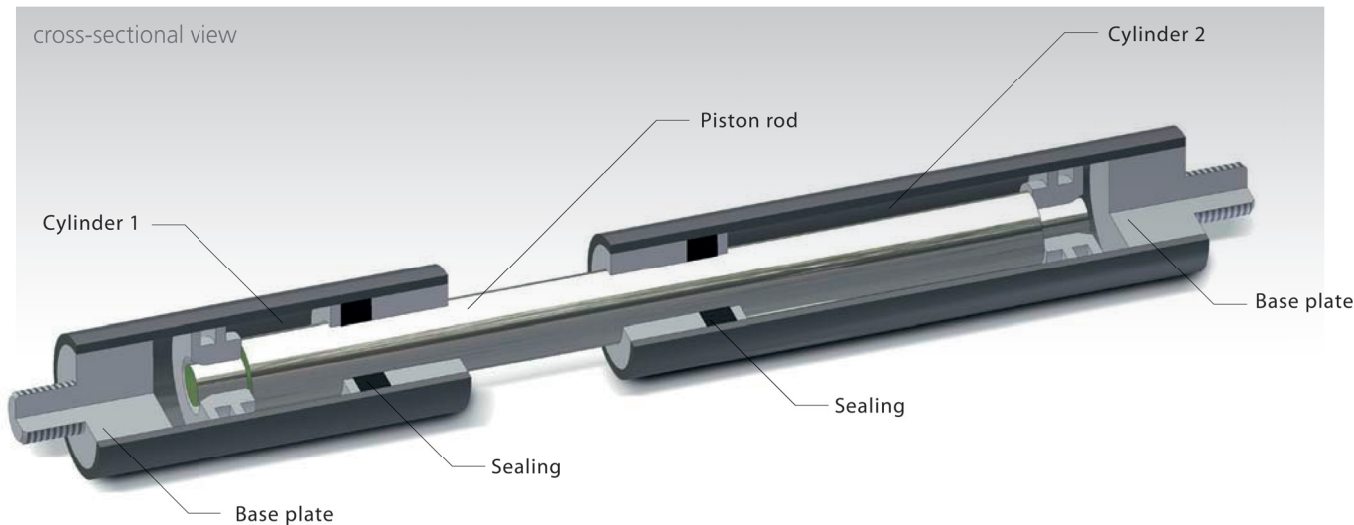


The special strength of HAHN Gasfedern is the solution of customer-specific tasks, for which we also develop unusual springs and products. The patent-protected double-stroke spring is an example for this.

HAHN Gasfedern developed special double-stroke gas springs for heavy flaps with a large opening angle, which are characterised by a low starting and a high ultimate force. These springs have two pressure cylinders that can be filled differently and thus are able to cover two force ranges. The compression of the piston rod generates a bent characteristic curve, which can be better adjusted to the force progression of the flap.


Double-stroke gas springs are specially designed for the application you require. The force ranges are exactly attuned to each other and adapted to the required kinematics. HAHN double-stroke springs are available in steel, in AISI 303/304 and AISI 316L/316Ti.



In this position, the point of gravity S is furthest away from the pivot point. The strongest force is required for opening the flap. Both strokes are compressed. The cylinder with the stronger force opens it.



In this position, the point of gravity S moves closer to the pivot point. A weaker spring force is required. Stroke 1 is extended in this position. The spring part 2 with the weaker force now becomes effective.



In this position, the point of gravity S is close to or directly on the pivot point. A weak spring force is required. Both strokes are fully extended.