


# Gas spring G 22-40 V2

<b>Extension force F1</b>	500 - 6000 Newton
<b>Progression</b>	50 %
<b>Piston rod</b>	Ø 22 mm, W. 1.4305 / AISI 303
<b>Cylinder</b>	Ø 40 mm, W. 1.4301 / AISI 304
<b>Threads</b>	W. 1.4305 / AISI 303

GZ 15

GZ 15

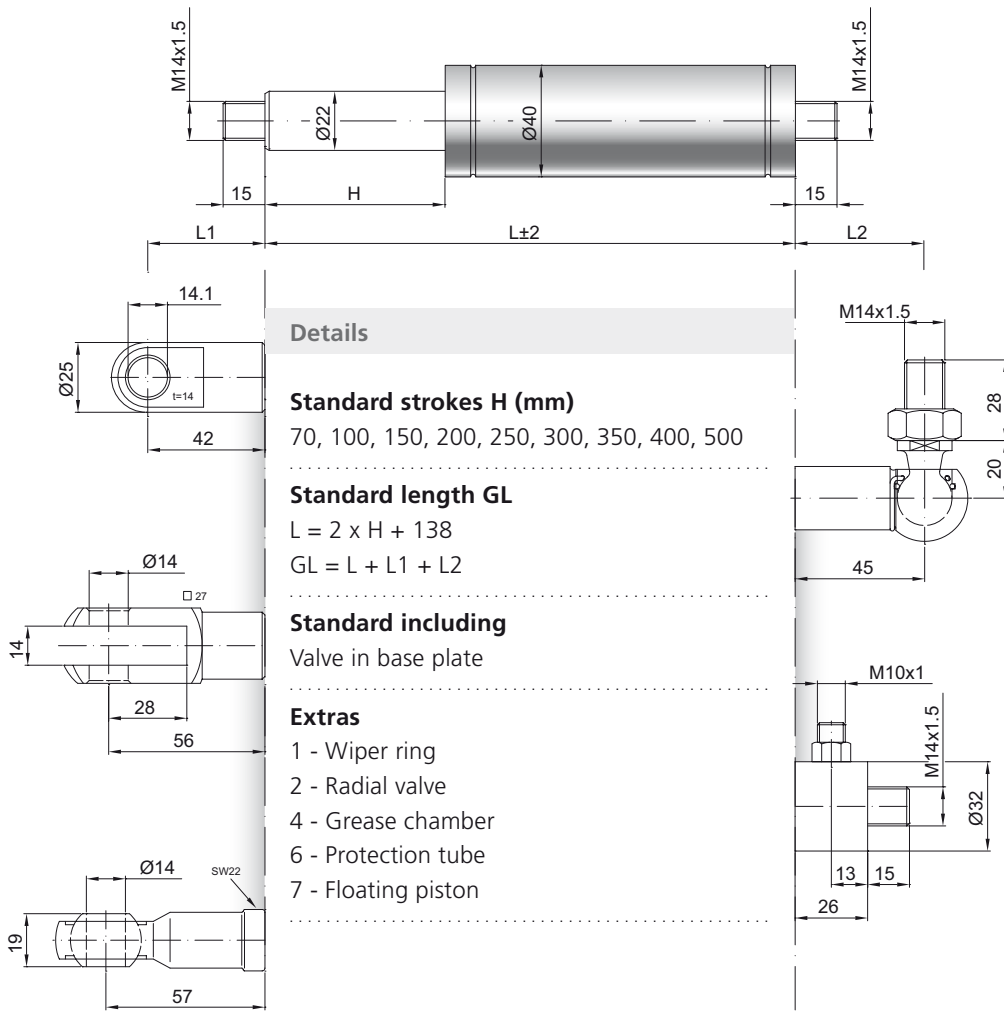

AU 42

WG 45

GA 56

QVGZ

AG 57

**Details**

**Standard strokes H (mm)**  
70, 100, 150, 200, 250, 300, 350, 400, 500

**Standard length GL**  
 $L = 2 \times H + 138$   
 $GL = L + L1 + L2$

**Standard including**  
Valve in base plate

**Extras**  
1 - Wiper ring  
2 - Radial valve  
4 - Grease chamber  
6 - Protection tube  
7 - Floating piston